



SELF-PROPELLED SCISSOR LIFTS

GS™-2669 RT, GS™-3369 RT, GS™-4069 RT



Specifications

MODELS	GS™-2669 RT		GS™-3369 RT		GS™-4069 RT	
MEASUREMENTS	US	Metric	US	Metric	US	Metric
Working height maximum*	32 ft	9.92 m	39 ft	11.96 m	46 ft	14.19 m
A Platform height maximum	26 ft	7.92 m	32 ft 8 in	9.96 m	40 ft	12.19 m
Drive height	26 ft	7.92 m	32 ft 8 in	9.96 m	40 ft	12.19 m
B Platform height - stowed	4 ft 10 in	1.47 m	4 ft 10 in	1.47 m	5 ft 5 in	1.65 m
C Platform length - outside	9 ft 2 in	2.79 m	9 ft 2 in	2.79 m	9 ft 2 in	2.79 m
	extended	14 ft 2 in	4.32 m	14 ft 2 in	4.32 m	4.32 m
Slide-out platform extension deck	5 ft	1.52 m	5 ft	1.52 m	5 ft	1.52 m
D Platform width - outside	5 ft 3 in	1.6 m	5 ft 3 in	1.6 m	5 ft 3 in	1.6 m
Toeboard height	6 in	0.15 m	6 in	0.15 m	6 in	0.15 m
E Height - stowed	8 ft 6 in	2.59 m	8 ft 6 in	2.59 m	9 ft	2.74 m
	rails lowered	6 ft 3.5 in	1.92 m	6 ft 3.5 in	2.08 m	2.08 m
F Length - stowed	12 ft 4 in	3.76 m	12 ft 4 in	3.76 m	12 ft 4 in	3.76 m
	platform extended	15 ft 9.5 in	4.81 m	15 ft 9.5 in	4.81 m	4.81 m
G Width	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m	5 ft 9 in	1.75 m
H Wheelbase	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m	7 ft 6 in	2.29 m
I Ground clearance - center	9.5 in	0.24 m	9.5 in	0.24 m	9.5 in	0.24 m



PRODUCTIVITY

Maximum platform occupancy***	4		4		3	
Lift capacity	1,500 lbs	680 kg	1,000 lbs	454 kg	800 lbs	363 kg
Extension deck capacity	300 lbs	136 kg	300 lbs	136 kg	300 lbs	136 kg
Drive speed - stowed	3.5 mph	5.6 km/h	3.5 mph	5.6 km/h	3.5 mph	5.6 km/h
Drive speed - raised	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h	0.3 mph	0.5 km/h
Gradeability - stowed****	35%		30%		30%	
Maximum outrigger leveling:	front to back		front to back		front to back	
	5.3°/4.2°		5.3°/4.2°		5.3°/4.2°	
Turning radius - inside	side to side		side to side		side to side	
	11.7°		11.7°		11.7°	
Turning radius - inside	83 in	2.11 m	83 in	2.11 m	83 in	2.11 m
Turning radius - outside	181.2 in	4.6 m	181.2 in	4.6 m	181.2 in	4.6 m
Raise/lower speed	26/33 sec		42/28 sec		69/46 sec	
Controls	proportional		proportional		proportional	
Drive	four wheel		four wheel		four wheel	
Tires - rough terrain	12x26 in	30x66 cm	12x26 in	30x66 cm	12x26 in	30x66 cm

POWER

Power source	Kubota D-1105 Diesel 24.8 hp					
Fuel tank capacity	10 gal	37.9 L	10 gal	37.9 L	10 gal	37.9 L
Hydraulic system capacity	18 gal	68.1 L	18 gal	68.1 L	18 gal	68.1 L

WEIGHT*****

	8,177 lbs	3,709 kg	8,577 lbs	3,890 kg	11,127 lbs	5,047 kg
--	-----------	----------	-----------	----------	------------	----------

STANDARDS COMPLIANCE


ANSI A92.6, CSA B354.2, CE Compliance, AS 1418.10

* The metric equivalent of working height adds 2 m to platform height. U.S. Adds 6 ft to platform height.

*** CE/AUS markets: GS™-3369 and GS™-4069 are limited to 2 person platform occupancy when used outdoors.

**** Gradeability applies to driving on slopes. Gradeability may vary depending on the weight of options installed on machine. See operator's manual for details regarding slope ratings.

***** Weight varies depending on options and country standards.

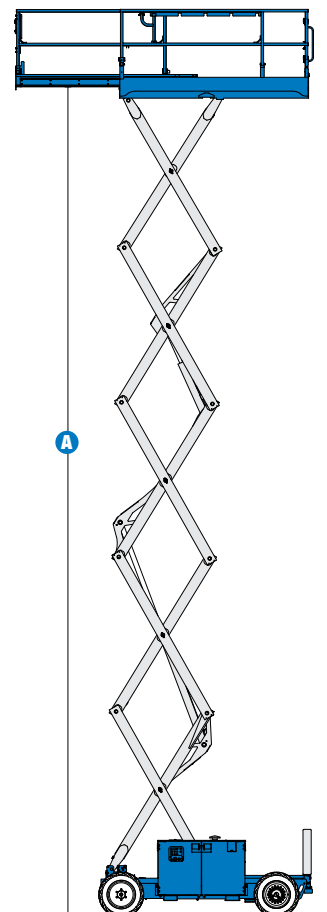

Features

STANDARD FEATURES

MEASUREMENTS

GS™-2669 RT

- 32 ft (9.92 m) working height
- Up to 1,500 lb (680 kg) lift capacity

GS™-3369 RT

- 39 ft (11.96 m) working height
- Up to 1,000 lb (454 kg) lift capacity

GS™-4069 RT

- 46 ft (14.19 m) working height
- Up to 800 lb (363 kg) lift capacity

PRODUCTIVITY

- 110 x 63 in (2.79 x 1.6 m) steel frame platform with replaceable aluminum deck
- 5 ft (1.52 m) extension deck
- Automatic leveling hydraulic outriggers
- Folding guardrails
- Proportional lift and drive
- Full height swing gate
- 4WD
- Front oscillating axle
- Positive traction control
- Four-wheel braking
- Swing-out engine tray
- Non-marking foam-filled rough terrain tires (eco fill)
- Tilt level sensor with audible alarm
- Descent alarm
- Horn
- Hour meter
- Dual flashing beacons
- Motion alarm
- Hydraulic oil cooler

POWER

- Kubota Diesel 24.8 hp (18.5 kW)

OPTIONS & ACCESSORIES

PRODUCTIVITY

- Air line to platform
- Platform work lights

POWER OPTIONS

- Cold weather package
- 240 Volt power to platform
- 7KVA Hydraulic generator (240 v/50 Hz)



FOR MORE INFORMATION CONTACT:

YRCO.CO.NZ

AUCKLAND HEAD OFFICE

Phone: (+64) 09 443 2436

Fax: (+64) 09 443 2435

Email: sales@yrco.co.nz

SOUTH ISLAND OFFICE

Phone: (+64) 03 341 6923

Fax: (+64) 03 341 6955

Email: gregl@yrco.co.nz



PROUD TO BE 100%
NEW ZEALAND
OWNED & OPERATED

YR® YOUNG/MAN
RICHARDSON
& CO. LTD.